



### A1101R08C-EM1

## **PRELIMINARY**

## Anaren Integrated Radio

## **Evaluation Module Series**


The A1101R08C-EM1 is a high-performance, interface board with an ETSI compliant A1101R08C connectorized radio module mounted for quick connection to the Texas Instruments CC1101DK Development Kit.

#### **Product Overview**


The A1101R08C-EM1 is an evaluation module with an Anaren A1101R08C radio module in the industry's smallest package (9 x 12 x 2.5mm) mounted on it. This evaluation module is designed specifically for compatibility with SmartRF®04, SmartRF®05 and Maverick evaluation boards, Each Anaren A1101R08C module is ETSI compliant and incorporates the Texas Instruments CC1101 transceiver chip.


As a standalone module for your final design implementation Anaren's A1101R08C has an LGA pad footprint with an industry-standard U.FL button connector receptacle, this module is designed to effortlessly integrate into a wide range of applications, including: industrial control, building automation, low-power wireless sensor networks, lighting control, and automated meter reading.

The A1101R08C has an RoHS-compliant ENIG finish and is packaged on tape and reel for high-volume automated manufacturing

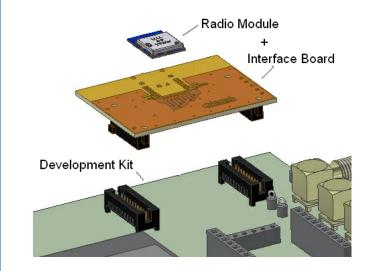

### Layout

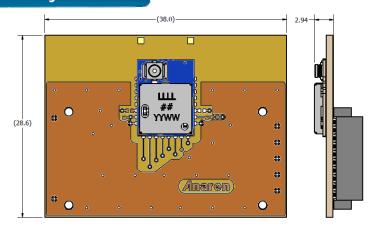

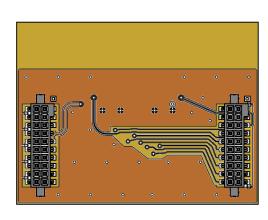











## **PRELIMINARY**

# Anaren Integrated Radio

### Pin Diagram

### **Development Kit Connectors**





#### Connector P1

#### **Connector P2**

| Pin 1  | GND          | Pin 1  | NC     |
|--------|--------------|--------|--------|
| Pin 2  | NC           | Pin 2  | GND    |
| Pin 3  | NC           | Pin 3  | NC     |
| Pin 4  | NC           | Pin 4  | GND    |
| Pin 5  | NC           | Pin 5  | NC     |
| Pin 6  | NC           | Pin 6  | GND    |
| Pin 7  | NC           | Pin 7  | VDD    |
| Pin 8  | NC           | Pin 8  | GND    |
| Pin 9  | NC           | Pin 9  | VDD    |
| Pin 10 | GDO0/ATEST   | Pin 10 | GND    |
| Pin 11 | NC           | Pin 11 | NC     |
| Pin 12 | GDO2 (Debug) | Pin 12 | GND    |
| Pin 13 | NC           | Pin 13 | NC     |
| Pin 14 | CSn          | Pin 14 | GND    |
| Pin 15 | NC           | Pin 15 | NC     |
| Pin 16 | SCLK         | Pin 16 | GND    |
| Pin 17 | NC           | Pin 17 | NC     |
| Pin 18 | SI           | Pin 18 | NC     |
| Pin 19 | GND          | Pin 19 | NC     |
| Pin 20 | SO/GDO1      | Pin 20 | DD_DIR |



This product shall not be used in any of the following products or systems without prior express written permission from Anaren Microwave, Inc. (i) implantable cardiac rhythm management systems, including without limitation pacemakers, defibrillators and cardiac resynchronization devices; (ii) external cardiac rhythm management systems that communicate directly with one or more implantable medical devices; or (iii) other devices used to monitor or treat cardiac function, including without limitation pressure sensors, biochemical sensors and neurostimulators.

#### **Nomenclature**



(Anaren) (1101, 2500)Chip series 2 Function (R = radio only) 3 Frequency band (x100MHz)

4 Form factor (A = Internal Antenna, C = Connector) 5 Module Type (EM1 = Eval Module, EZ4x = EZ-430 Module)

To view the entire available family of AIR Modules & Development options, please visit our website at:

http://www.anaren.com/content/File/AIR/AIRoverview.cfm



PLEASE NOTE: Additional information on the Texas Instruments CC1101 Development Kit can be found in the company's latest datasheet release at http://www.ti.com



Caution! ESD sensitive device. Precautions should be used when handling the device in order to prevent permanent damage.

